



Honda NC750 Crashbar

Installation Guide

A qualified, experienced motorcycle technician should install Rockfox products. If you are unsure of your ability to properly install a product, please have the product installed by your local motorcycle dealer. Rockfox takes no responsibility for damages caused by improper installation. All screws, bolts and nuts, including all replacement hardware provided by Rockfox, should be tightened to the torque specified in the OEM maintenance manual for your motorcycle. If no torque specifications are provided in the OEM maintenance manual, the following torques may be used: M6 – 9,6Nm; M8 – 23Nm; M10 – 46Nm. All screws, bolts and nuts should be checked after driving the first 50 km to ensure that all are tightened to the proper torque. Medium strength liquid thread-locker (i.e., "Loctite") should be used to secure all screws bolts and nuts.

Tools required: 17 Socket
6mm Allen key
5mm Allen key

Contents: 1 x Left Side Rack
1 x Right Side Rack
1 x Cross Bar
1 x Pack of bolts


Right Side

Step 1




Remove the plastic bashplate by undoing the two screws on either side of it and pulling it off the bike, some resistance will be encountered as they use rubber grommets with push through pins.

Step 2

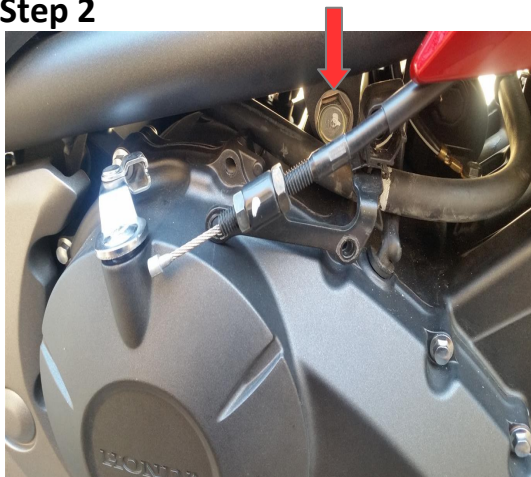


Remove the two screws that holding the clutch cable bracket on. Move the bracket out of the way (Wrap it in a cloth to prevent scratches). Remove the large M10 bolt (Shown) Beware there is a spacer behind that can sometimes come loose.

Step 3

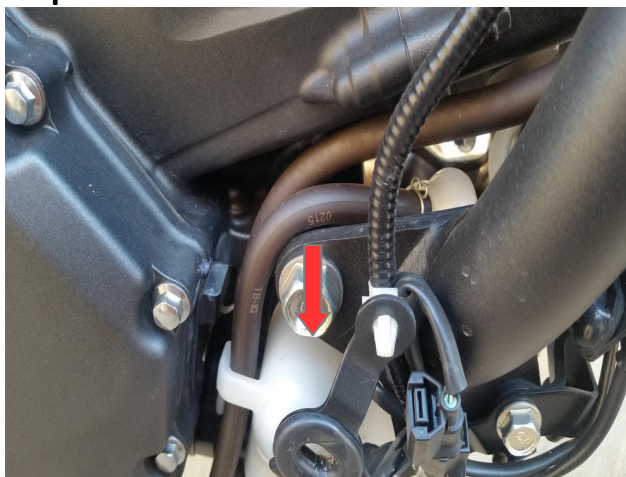

Remove the lower M10 bolt(Shown)
Please note the spacer behind the bolt might come loose. Fix the right hand side crashbar to the bike using the bolts from the motorcycle. Do not tighten fully.

Step 4

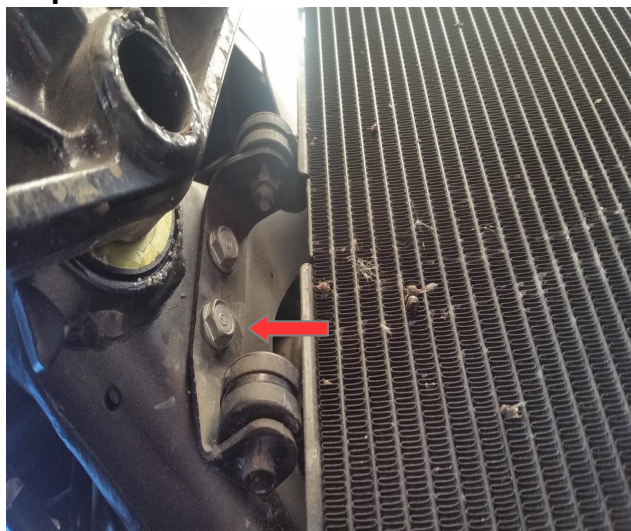

Remove the front bolt above the radiator. (Shown) fit the crossbar into the right side crashbar and fix the bolt back into the bike. Do not tighten fully.

Repeat steps 2 & 3 for the left hand side

Step 6



Tighten all the bolts and use the two M6 grub screws to pinch the crossbar between the left and right hand side crashbars.

As a precaution go through all bolts and nuts and tighten as needed.

Final product



Please contact us if any problems occur.

Regards
The Rockfox Team